

Colyer.







NEXT GEN TECHNOLOGY. NEXT LEVEL CMYK+ INNOVATION.

Experience the promise of the future in a groundbreaking design structure, where innovative expandable colours in a compact body inspire you to take on the new challenges that can grow your business.



PRINT. CREATIVELY.

Discover next-level print quality and our specialty CMYK+ toner integrated into a familiar compact design. Experience high-quality CMYK printing and the remarkable brilliance of metallic colours thanks to the Super EA-Eco toner typically found in high-end models. Expanded features let anyone unlock a new world of printing possibilities effortlessly.



PRINT. PRODUCED.

Let superb productivity and professional print quality provide the robust support your business needs. Our print server ensures reliability as it excels in delivering high-quality, high-productivity solutions across a host of tasks.



PRINT. INTELLIGENTLY.

The consistent print quality and operational efficiency automation offer can revolutionize your business. Let machines handle the heavy lifting that used to need specialized expertise and skills, and watch your business grow sustainably.



PRINT. FLEXIBLY.

Meet a wider range of creative requirements thanks to paper compatibility, post-processing, and easy operation. Expand your printing possibilities and offer more of the innovative solutions that grow your business.



PRINT. CREATIVELY

Unleash creativity and create new value

CMYK+ specialty toner print engine

Specialty toners are available in gold, silver, clear, pink, and textured paper toner.* One specialty toner can be used in addition to CMYK for overprinting. Unique patented technology improves productivity, image quality, and paper versatility performance and significantly downsizes the print



Layer CMYK over gold and silver and achieve spectacular metallic colours thanks to Fujifilm




CMYK produces a textured, glossy feel and a sense of luxury.



Master specialty toner with a full range of support functions

- Automatic pink toner optimization to realize wider colour gamut and smooth skin tone. (available in Revoria Flow)
- Specialty Colour Quick Viewer (SCQV) allows user to preview the effect of specialty colours as well as different substrates before printing.
- Users can quickly change to a specific specialty colour to save labor costs and turnaround times.

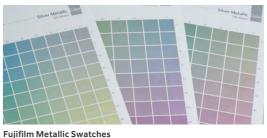

Proprietary technology for CMYK high image quality

Super EA*-Eco toner (CMYK)

- Features high-quality Super EA-Eco toner identical to those used in our high-end models.
- Toner particle size has been reduced to among the smallest in the industry, and toner particle shape standardized for crisp rendering of detailed characters and fine lines.
- Gradations, such as halftones, are reproduced more smoothly and beautifully for more even blue skies and skin tones.

* EA: Emulsion Aggregation

2,400 x 2,400 dpi LED printhead

Thanks to our unique technology, the compact, high-image-quality LED printhead delivers highresolution output at up to 2,400 x 2,400 dpi for sharp lines and images, enabling high-definition

PRINT. PRODUCED.

Making productivity and print quality work together

100 ppm high productivity

- Realize top speed for weight 52-400 gsm both coated and uncoated paper.
- High-productivity A3 printing at 55 ppm.
- The compact belt-roll fuser that enables efficient heating achieves high productivity and high image quality on wide variety of paper stocks including heavyweight



Calibration for G7 standard

G7 calibration achieves consistent gray balance and neutral tonality across different printing processes, substrates, and printing conditions. A standard that is widely adopted in the printing industry to ensure colour consistency and quality across various printing technologies and platforms.

Note: G7® is Idealliance's global industry-leading set of specifications for achieving visual similarity across all print

High resolution-, high productivity-ready print server

- 1,200 x 1,200 dpi RIP processing reproduces images with their original vivid quality. Even fine text and lines can be reproduced at 1,200 dpi resolution.
- High-precision 3D calibration and feedback functions ensure consistent colour reproduction.
- Different-sized data can be imposed at any desired position for more efficient use of long sheets and reduced paper waste.

PRINT. INTELLIGENTLY.

Supporting your business growth

Real-time detection and correction during printing*

- Automatic detection and correction of colour variations and frontto-back misalignments during printing.
- Optimization continues throughout the printing process, with little to no decrease in print speed.



Al correction

• Al automatically identifies the scene per photo, applies appropriate image correction, and prints them beautifully.



PRINT. FLEXIBLY.

More printing possibilities than ever before

- Offer better solutions thanks to reliable technologies that enable a wide variety of paper sizes and post-processing.
- Supports a wide range of paper sizes, from a minimum of 90 x 146 mm up to 330 x 660 mm, with optional long sheet printing (single-sided) up to 330 x 1,300 mm.
- Paper weights flexibility from lightweight 52 gsm to heavyweight 400 gsm.



Technology that keeps you ready for anything

Print beautifully even on textured paper

The intermediate transfer belt ensures reliable, high-quality output even on typically difficult-to-print textured media, such as embossed and LEATHAC papers.



Removes static electricity for stable paper handling*

- Enables stable paper handling.
- Protect operators safely from high amount of static electricity.

Reliable paper feed across various types of paper*

▲ Supports long sheet sizes up to 330 x 1,300 mm.

The air-suction feed tray, equipped with our proprietary Shuttle Head technology, ensures a reliable feed of papers prone to paper dust accumulation, textured papers, and coated papers that tend to stick together.

* Air Suction Feeder


Revoria Press EC2100S / EC2100



Various Options Available According to Needs

Full Configuration W9,760 x D834 x H1,370 mm*

* Extension Kit and Extension Kit Extra are not included in height.

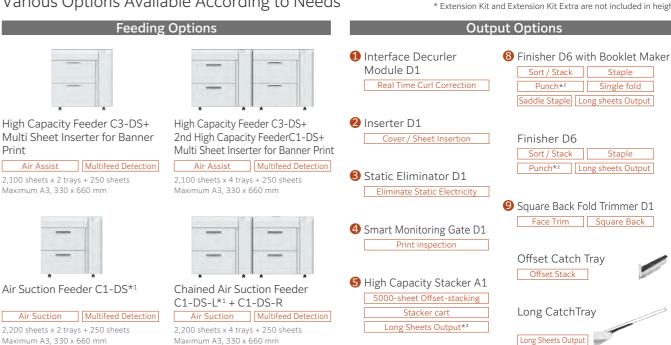



Air Suction Feeder C1-DSXL*1+ Banner Unit for Air Suction Feeder C1-DSXL

Air Suction Multifeed Detection Long Sheets Feeding

900 sheets + 2,200 sheets + 250 sheets Maximum A3, 330 x 1,300 mm (Upper tray)

Chained Air Suction Feeder


Maximum A3, 330 x 660 mm

C1-DSXL*1 + C1-DS-R + Banner Unit for Air Suction Feeder C1-DSXL Air Suction Multifeed Detection

Long Sheets Feeding 900 sheets + 2,200 sheets x 3 trays + 250 sheets Maximum A3, 330 x 1,300 mm (Left Upper tray)

6 Crease / Two-sided Trimmer D2 Two-Sided Trim Crease

7 Folder Unit CD2 Z Fold Half Sheet Tri-fold



*1: Multi Sheet Inserter for Banner Print is equipped as standard.





















*1: Up to 5 creases are possible for mountain fold and valley fold. *2: Full Bleed Trim is performed for Two-Sided Trim and Face Trim.

Print Servers

*2: Optional








Reliable Support System

Remote Services*

FUJIFILM Business Innovation Remote Services enhance machine reliability, uptime, and productivity, ensuring seamless business operations. Using remote services to connect our support systems and tools with skilled teams worldwide, we deliver responsive assistance precisely when you need it. This proactive approach, supported by in-depth knowledge and comprehensive product understanding, lets us offer the solutions you need.

- * This support availavility varies depending on the location. For more information, please consult your assigned sales representative.
- Seamless one-way communication between your device and our data centre.
- Reduce downtime by transmitting machine data to detect and prevent problems.
- · Automatically report billing meters to save time and improve accuracy.

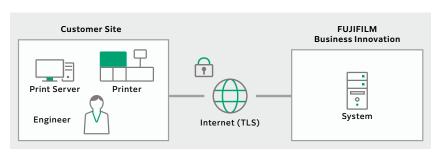







ENERGY STAR certified the combination with Revoria Flow Print Servers



global.fujifilm.com

FUJ¦FILM

FUJIFILM Business Innovation Corp.

9-7-3, Akasaka Minato-ku, Tokyo 107-0052 TEL: +81-3-6271-5111

fujifilm.com/fbglobal

hello@colyer.co.uk hello@colyer.co.uk
LONDON: 020 7833 0888
UK: 01483 596200
colyer.co.uk The available model varies depending on the country/region. Please ask the sales representatives for details.

Adobe PDF Print Engine

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law: Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates: *Unused postage stamps, post cards, etc. *Certificate stamps stipulated by law. *Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

personal use, family use or other similar uses within a limited circle.

Trademarks - FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. Revoria Revoria logo, Revoria Press and Revoria Flow are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. Adobe, Adobe logo, PostScript and PostScript logo, Adobe PDF, Adobe PDF Print Engine are either registered trademarks or trademarks of Adobe in the United States and/or other countries. Windows, Windows Server and Active Directory are registered trademarks of Microsoft Corporation.

Fiery and the Fiery logo are trademarks or registered trademarks of Fiery, LLC and/or its wholly owned subsidiaries in the U.S. and/or certain other countries. All rights reserved. G7 is a registered trademark of Idealliance. Idealliance. Idealliance and promote an ames mentioned in this brochure are trademarks or registered trademarks of their respective companies.



Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.